



## 2837488 - Smartgrid cabinet UNI-SIG-690IT-ISO

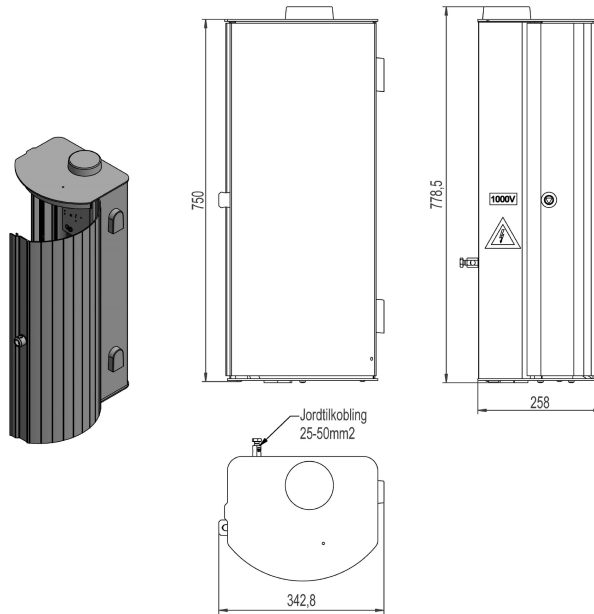

Description	Smartgrid cabinet for network supervision 690V IT. Detects earth fault by measuring insulation resistance.
Unit	PSC
Weight	18 kg
Material	Aluminium, anodised-brown
Voltage/System configuration	690V IT
Fastening method	Pole/Wall
Degree of protection (IP)	IP44
Output antenna	MCX-m

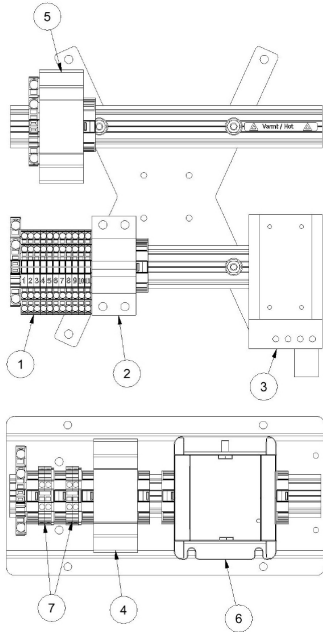

Bestykning			
Pos.nr	Tag.nr i skjema	Matriell	Egenskaper
1	X2	Rekketerminaler/Terminal blocks	0,25-4mm <sup>2</sup>
2	F1	Automatsikring/Circuit breaker	C-karakteristikk 0,5A Icu=20kA / 230V Icu=10kA / 400V
3	R1	Varmeelement/Enclosure heater	50W med termostat / 50W with thermostat
4	Q5	Tilkoblingsenhet / coupling device	Bender AGH422, Un = <1000V AC/DC
5	Q6	Isometer	Bender isoHV425 med/with RS485 og/and 2 stk. digital utgang
6	T1	Transformator / Transformer	1-fase/phase 690V/230V 100VA
7	X1	Rekketerminaler/Terminal blocks	0,25-4mm <sup>2</sup> , 1000 V
		Antenne / Antenna	Vandalstikker / vandal proof IP67 Bånd/Band: 2G/3G/4G/NB IoT Frekvensområde/frequency area: 790Mhz-960Mhz 170Mhz-2690Mhz Tilkobling / connection: MCX-m Plassering / placement: Topp / top
		Jordtilkobling / Ground connection	Innvendig / inside: 6mm <sup>2</sup> Utvendig / outside: 50mm <sup>2</sup>
		Dørlås / Doorlock	Låsbar trekantlås / Triangle lock with padlock option
		Kabelgjennomføringer i bunn / cable entries	1 stk ø5-7mm 1 stk ø14- 20mm 3 stk ø8-14mm 1 anmerkning for boring / 1 countersunk for drilling