



2851778 - Smartgrid cabinet UNI-SIG-230IT-09

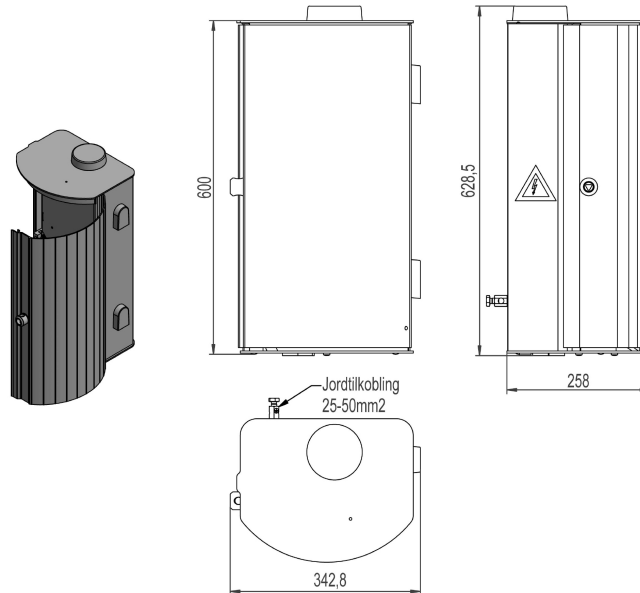

| | |
|------------------------------|--|
| Description | Smartgrid cabinet for network supervision 230V IT-grid. With double mounting plate and antenna MCX-m. Connection for 2 CTs. Equipped with Kaifa MBUS dongle. |
| Unit | PSC |
| Weight | 12 kg |
| Material | Aluminium, anodised-brown |
| Voltage/System configuration | 230V IT |
| Fastening method | Pole/Wall |
| Degree of protection (IP) | IP44 |
| Output antenna | MCX-m |

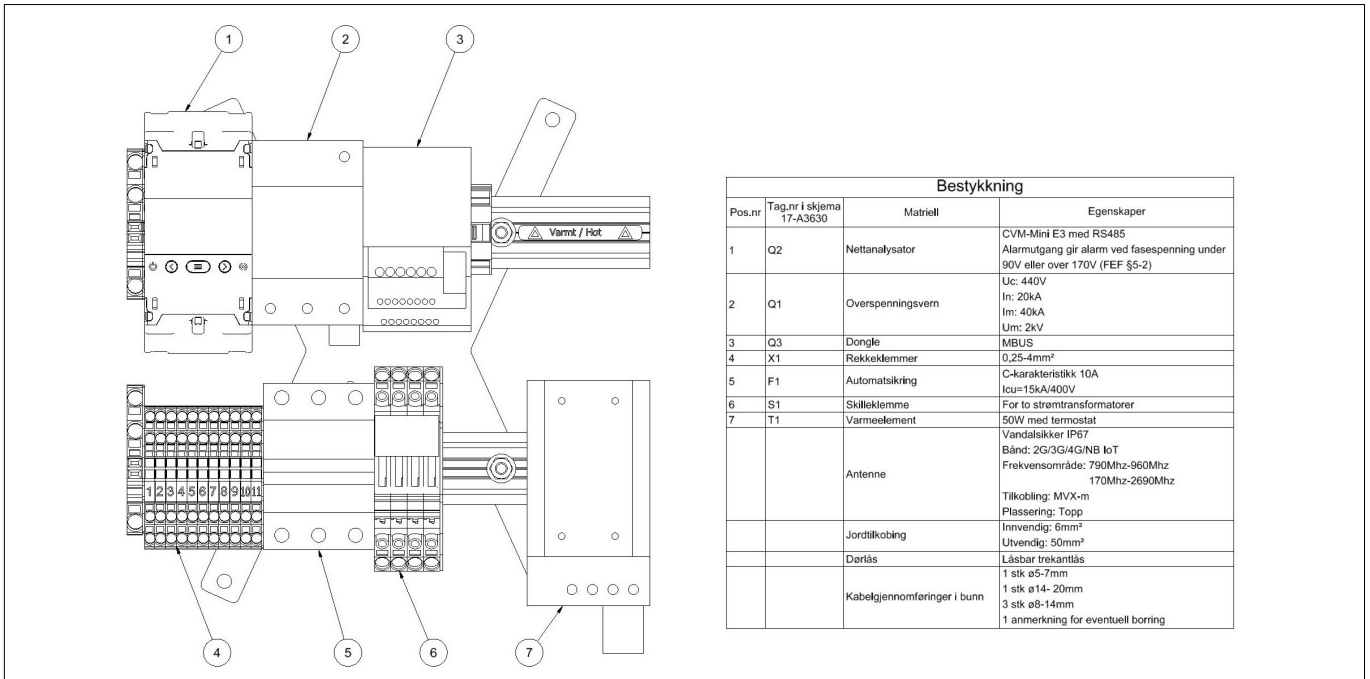

| Bestykning | | | |
|------------|-----------------------------|-----------------------------|--|
| Pos.nr | Tag.nr i skjema 17-A3630 | Materiell | Egenskaper |
| 1 | Q2 | Nettanalysator | CVM-Mini E3 med RS485 Alarmutgang gir alarm ved fasespenning under 90V eller over 170V (FEF §5-2) |
| 2 | Q1 | Overspenningsvern | Uc: 440V In: 20kA Im: 40kA Um: 2kV |
| 3 | Q3 | Dongle | MBUS |
| 4 | X1 | Rekkeklemmer | 0,25-4mm ² |
| 5 | F1 | Automatsikring | C-karakteristikk 10A Icu=15kA/400V |
| 6 | S1 | Skilleklemme | For to strømtransformatorer |
| 7 | T1 | Varmeelement | 50W med termostat |
| | | Antenne | Vandalsikker IP67 Bånd: 2G/3G/4G/NB toT Frekvensområde: 790Mhz-960Mhz 170Mhz-2690Mhz |
| | | Jordtilkobling | Tilkobling: MVX-m Plassering: Topp Innvendig: 6mm ² Utvendig: 50mm ² |
| | | Døråp | Låsbar trekantlås 1 stk ø5-7mm |
| | | Kabelgjennomføringer i bunn | 1 stk ø14-20mm 3 stk ø8-14mm 1 anmerking for eventuell boring |